


The MLM Series is a range of state of the art live sound stage monitors. The MLM15 cabinet combines a 15" Mid/Bass cone with a coaxially mounted 3" HF voice coil, which is passively crossed over. The coaxial layout has many acoustic advantages and also means that with a centrally mounted HF driver matched pairs are not required. To aid functionality the cabinet also benefits from a tophat mount which enables the cabinet to be used for small front of house applications. The monitor also benefits from being low profile to improve those all important sight lines. Another useful feature is link through speakons on the cabinet ends, ensuring neat cabling when used as pairs.

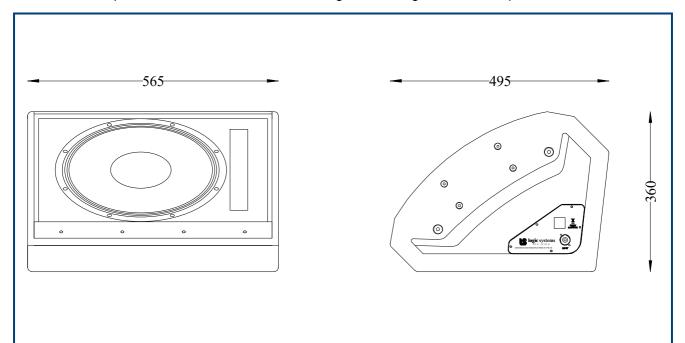

| Frequency Response: | • 50Hz – 18kHz | | |
|----------------------|--|--|--|
| Components: | Bass/mid: 15" cone driver | | |
| | HF: 3" voice coil, coaxially mounted | | |
| Power handling: | • 400w | | |
| Sensitivity (1): | • 97dB | | |
| Directivity: | 60° conical above 1kHz | | |
| Impedance: | 8 Ohms nominal | | |
| Construction: | 15mm & 24mm Birch plywoodWater based textured black paint | | |
| Finish: | | | |
| Connections: | 2 x Neutrik NL4 connectors | | |
| | 1+/1- Input 2+/2- no connection | | |
| Dimensions: | • 565mm (W) x 360mm (H) x 495mm (D) | | |
| Packaged Dimensions: | • 710mm (W) x 490mm (H) x 625mm (D) | | |
| Weight: | • 27Kg | | |

| Cabinet | Handles | Tophat | M20 | Castors | Bracket Pt. | Inserts/Fly Points |
|---------|---------|--------|-----|---------|-------------|--------------------|
| MLM15 | Yes | Yes | No | No | Yes | Yes |

Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise

E: sales@logicsystems.co.uk T: +44(0)1427 611791 w: www.logicsystems.co.uk