

CM 20SB - Technical Specifications (rev2 01/05/01)

Description: • A compact, sub bass enclosure, with 150Hz low pass filter.

• For optimum bass response use with EQ1520 controller.

Frequency Response: • 45Hz – 150Hz

Components: • Sub Bass: 1 x 18" cone driver

Power handling:
Sensitivity (1):

• 1KW
98dB

Connections:

Directivity:Construction:Omni-directional18mm Birch plywood

Finish: • Water based textured black paint (M-Spec and T-Spec)

Royal Blue carpet (R-Spec)2 x Neutrik NL4 connectors

2 x Neutrik NL4 connectors
1+/1- input 2+/2- No connection


 Dimensions:
 • 505mm (W) x 780mm (H) x 500mm (D)

 Packaged Dimensions:
 • 520mm (W) x 805mm (H) x 515mm(D)

Impedance: • 8 ohms nominal

Weight: • 49 Kg

Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.

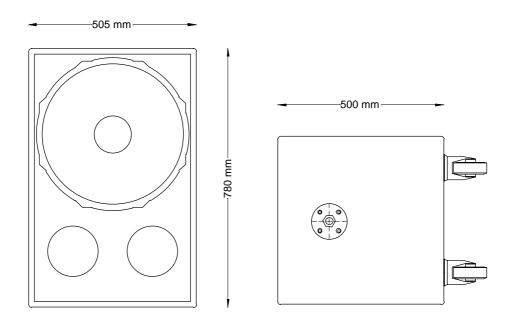

CM 20SB Options

Cabinet	Code	Spec.	Handles	Tophat	M20 plate	M20 Blank	Castors	Bracket	Inserts/Fly Points
CM 20SB	LS 2046	R-Spec	4 off	No	Yes (2)	No	Yes	No	No
CIVI 203B	LS 4046	M-Spec	4 off	No	No	Yes (2)	No	No	No
	LS 6046	T-Spec	4 off	No	Yes (2)	No	Yes	No	No