


CS I290SB – Technical Specifications (rev: 4 10/06/05)

Description:	<ul style="list-style-type: none"> • A compact, sub bass enclosure. • Requires 6th order EQ for optimum bass performance. (Refer to DSP settings.)
Frequency Response:	<ul style="list-style-type: none"> • 40Hz – 150Hz
Components:	<ul style="list-style-type: none"> • Sub Bass: 1 x 18” cone driver
Power handling:	<ul style="list-style-type: none"> • 1Kw
Sensitivity (1):	<ul style="list-style-type: none"> • 98dB
Directivity:	<ul style="list-style-type: none"> • Omni-directional
Construction:	<ul style="list-style-type: none"> • 18mm Birch plywood
Finish:	<ul style="list-style-type: none"> • Dark Grey carpet
Connections:	<ul style="list-style-type: none"> • 2 x Neutrik NL4 connectors • 1+/1- input 2+/2- linked
Dimensions:	<ul style="list-style-type: none"> • 505mm (W) x 780mm (H) x 600mm (D)
Packaged Dimensions:	<ul style="list-style-type: none"> • 520mm (W) x 805mm (H) x 615mm(D)
Impedance:	<ul style="list-style-type: none"> • 6 ohms nominal
Weight:	<ul style="list-style-type: none"> • 48 Kg

Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.

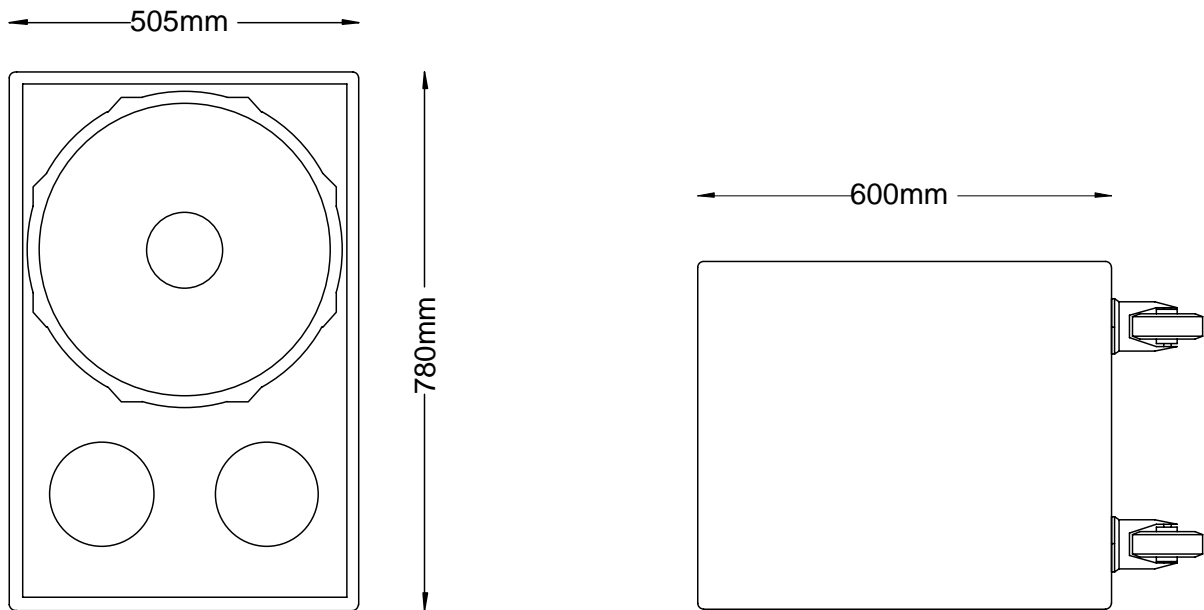

CS I290SB Options

Cabinet	Code	Handles	Tophat	M2o plate	M2o Blank	Castors	Bracket	Inserts/Fly Points
CS1290SB	LS 2030	4 off	No	No	No	Yes	No	No