


CS 1296 – Technical Specifications (rev: 4 10/06/05)

Description:	• A compact, fully horn loaded, passive mid/top enclosure.
Frequency Response:	• 150Hz – 20kHz
Components:	• Mid: 12" cone driver • HF: 2" exit co-entrant compression, co-axially mounted on CD horn
Power handling:	• 400w
Sensitivity (1):	• 105dB
Directivity:	• 60H x 40V
Construction:	• 18mm Birch plywood
Finish:	• Dark Grey carpet
Connections:	• 2 x Neutrik NL4 connectors • 1+/1- linked 2+/2- Input
Dimensions:	• 505mm (W) x 780mm (H) x 500mm (D)
Packaged Dimensions:	• 520mm (W) x 805mm (H) x 515mm(D)
Impedance:	• 6 ohms nominal
Weight:	• 58 Kg

Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.

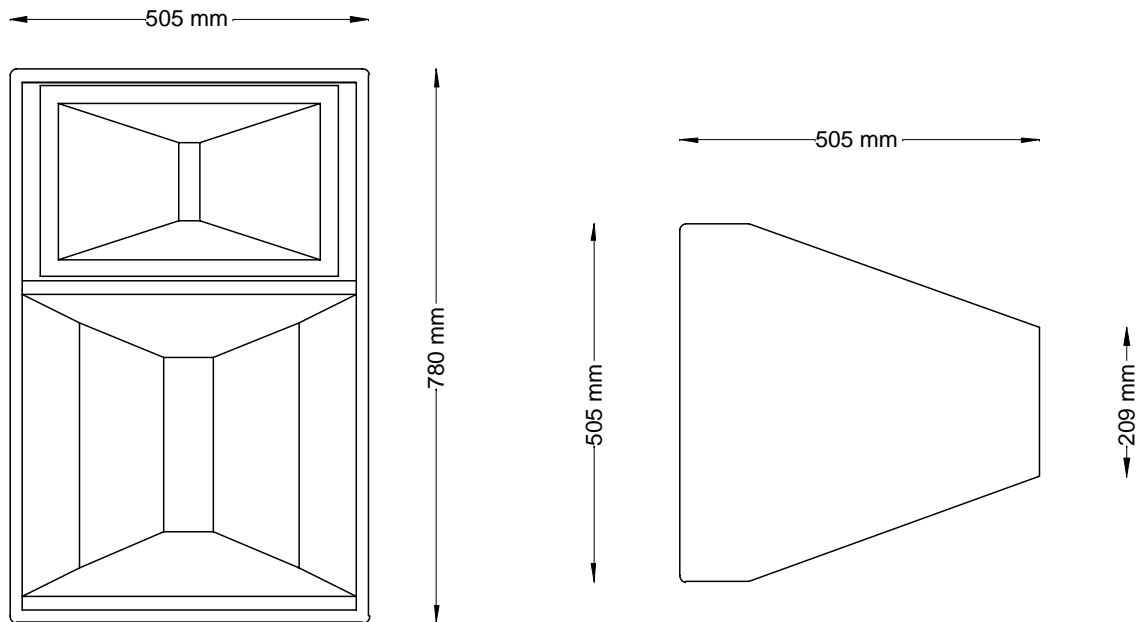

CS 1296 Options

Cabinet	Code	Handles	Tophat	M2o plate	M2o Blank	Castors	Bracket	Inserts/Fly Points
CS 1296	LS 2032	4 off	No	No	No	No	No	No