




B2i is a compact, high power; direct radiating, installation specific bass enclosure, which is designed to be used as part of an Ethos Array installed system. The cabinet employs two 15” cone transducers, each mounted in their own-vented back cavity, while both drivers are also co-aligned into a V shaped front manifold. The fly tracks found on the Ethos B2 on which the cabinet is based are replaced by M10 insert points. Brackets which allow cabinets to be linked together allow the B2i to be flown above an Ethos VAI array, they also allows B2i cabinets to be linked together for greater safety when ground stacked and permits the B2i to be used as a base for an installation specific ground stack. Offering high power detailed bass response in a compact package; the B2i is integral element of the Ethos array installation system.

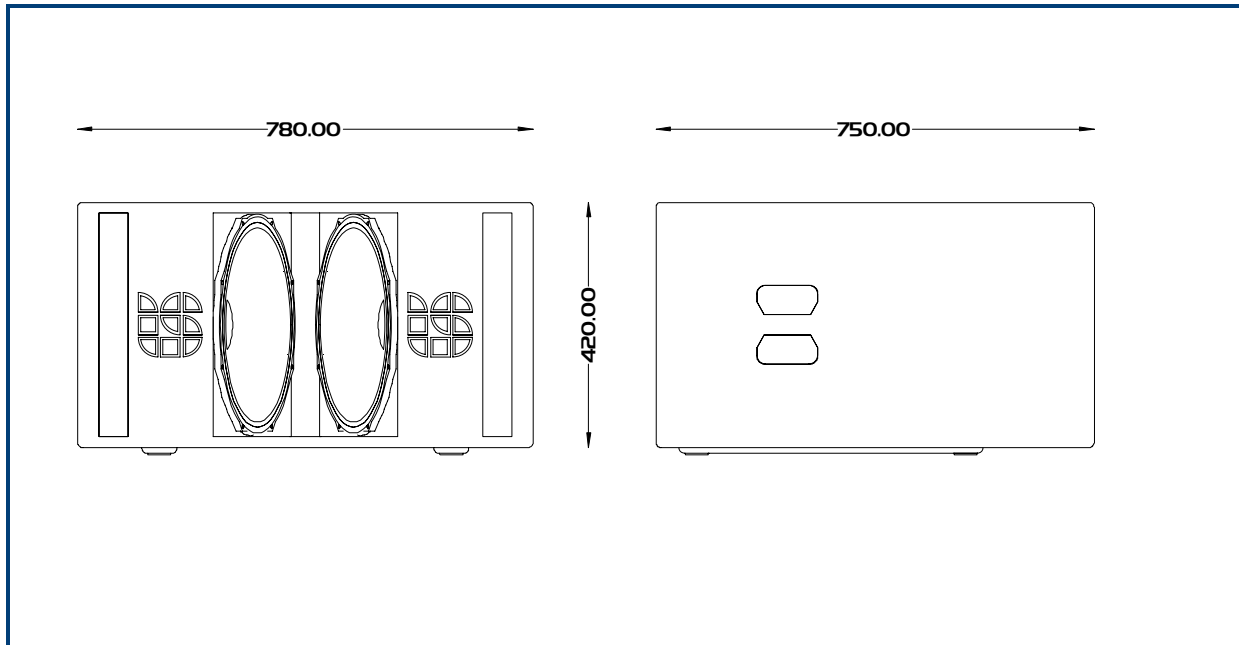

Frequency Response:	• 40Hz – 15kHz
Components:	• Bass/mid: 2 off 15” cone drivers
Power handling:	• 2 x 500W
Sensitivity (1):	• 102 dB
Directivity:	• Omni-directional
Impedance:	• 2 x 8 Ohm
Construction:	• 18mm Birch plywood
Finish:	• Water based textured black paint
Connections:	• 2 x Neutrik NL4 connectors. 1 x EP6 connector. • 1+/1- Driver 1 2+/2- driver 2
Dimensions:	• 780mm (W) x 420mm (H) x 750mm (D)
Packaged Dimensions:	• 910mm (W) x 530 mm (H) x 860mm (D)
Weight:	• 57Kg

Cabinet	Handles	Tophat	M20 plate	Castors	Bracket Pt.	Inserts/Fly Points
B2i	6 off	No	No	No	No	20 off M10 insert points

Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.