


LS 101 – Technical Specifications (rev2 01/05/01)


Description:	<ul style="list-style-type: none"> • A compact, passive, full range sound reinforcement enclosure.
Frequency Response:	<ul style="list-style-type: none"> • 60Hz – 18kHz
Components:	<ul style="list-style-type: none"> • Bass/mid: 10" cone driver • HF: 1" exit compression driver co-axially mounted on CD horn
Power handling:	<ul style="list-style-type: none"> • 300w
Sensitivity (1):	<ul style="list-style-type: none"> • 97dB
Directivity:	<ul style="list-style-type: none"> • 90H x 40V above 1kHz
Construction:	<ul style="list-style-type: none"> • 15mm Birch plywood
Finish:	<ul style="list-style-type: none"> • Water based textured black paint (M-Spec) • Royal Blue carpet (R-Spec)
Connections:	<ul style="list-style-type: none"> • 2 x Neutrik NL4 connectors • Passive: 1+/1- Input 2+/2- No connection
Dimensions:	<ul style="list-style-type: none"> • 365mm (W) x 560mm (H) x 305mm (D)
Packaged Dimensions:	<ul style="list-style-type: none"> • 380mm (W) x 580mm (H) x 320mm(D)
Impedance:	<ul style="list-style-type: none"> • 8 ohms nominal
Weight:	<ul style="list-style-type: none"> • 22 Kg
Note:	(1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.

← 365 mm →

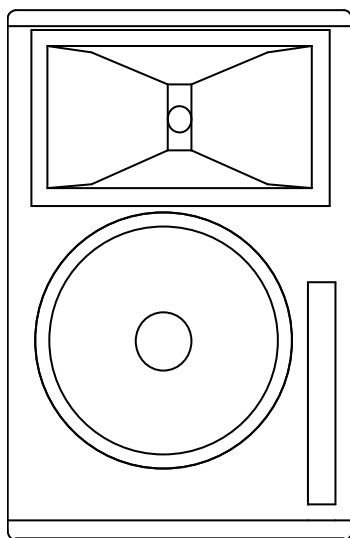

560 mm

← 305 mm →

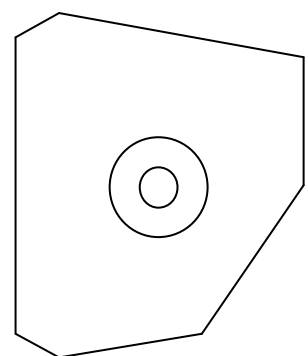

LS 101 Options

Cabinet	Code	Spec.	Handles	Top hat	M20 plate	M20 Blank	Castors	Bracket	Inserts/Fly Points
LS 101	LS 2011	R-Spec	1 off	Yes	No	No	No	No	No
	LS 4011	M-Spec	1 off	Yes	No	No	No	No	6 off M10 inserts