


LS 150 – Technical Specifications (rev3 17/07/003)

| | |
|---|---|
| Description: | <ul style="list-style-type: none"> • A high power, compact, bass enclosure. • Requires 6th order EQ for optimum bass performance. (Refer to DSP settings.) |
| Frequency Response: | <ul style="list-style-type: none"> • 40Hz – 150Hz |
| Components: | <ul style="list-style-type: none"> • Bass: 1 x 15" cone driver |
| Power handling: | <ul style="list-style-type: none"> • 500w |
| Sensitivity (1): | <ul style="list-style-type: none"> • 101dB |
| Directivity: | <ul style="list-style-type: none"> • Omni-directional |
| Construction: | <ul style="list-style-type: none"> • 18mm Birch plywood |
| Finish: | <ul style="list-style-type: none"> • Water based textured black paint |
| Connections: | <ul style="list-style-type: none"> • 2 x Neutrik NL4 connectors (Main plate) • 1 x Neutrik NL4 connector (Bi-amp plate) • Main plate: 1+/1- Input 2+/2- Linked • Bi-amp plate: 1+/1- linked to 2+/2- main plate 2+/2- No connection |
| Dimensions: | <ul style="list-style-type: none"> • 425mm (W) x 631mm (H) x 410mm (D) |
| Packaged Dimensions: | <ul style="list-style-type: none"> • 440mm (W) x 656mm (H) x 425mm(D) |
| Impedance: | <ul style="list-style-type: none"> • 4 ohms nominal |
| Weight: | <ul style="list-style-type: none"> • 25 Kg |
| Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise. | |

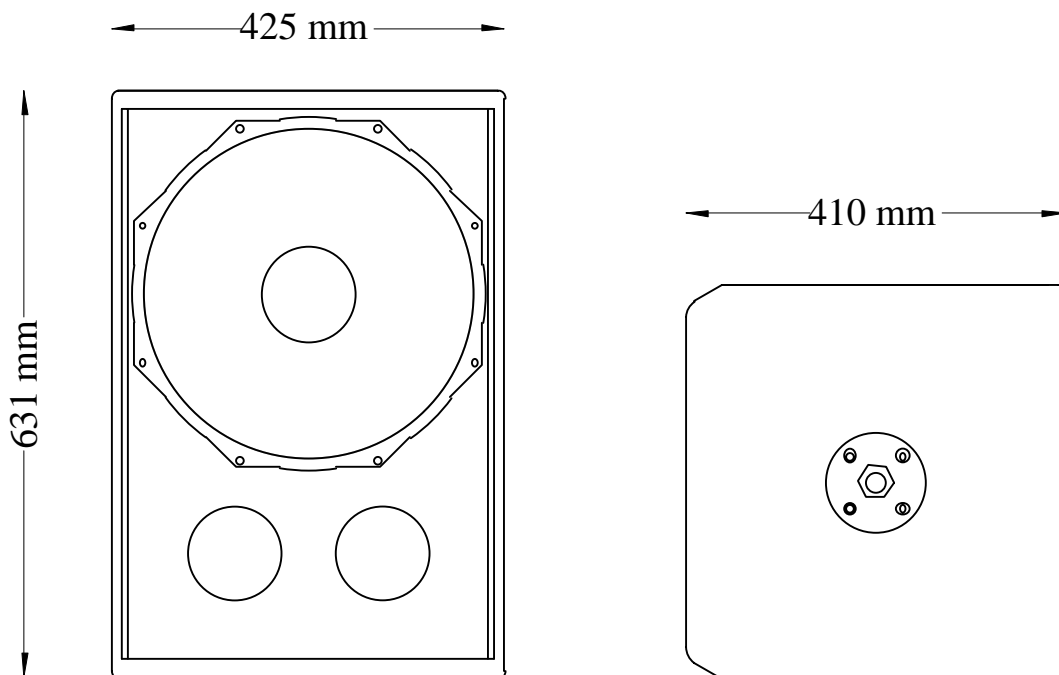

LS 150 Options

| Cabinet | Code | Spec. | Handles | Tophat | M20 plate | M20 Blank | Castors | Bracket | Inserts/Fly Points |
|---------|--------|--------|---------|--------|-----------|-----------|---------|---------|--------------------|
| LS 150 | LS6064 | T-spec | 2 Off | No | Yes | No | No | No | No |