


LS 215 – Technical Specifications (rev2 01/05/01)

Description:	<ul style="list-style-type: none"> • A high power, compact, bass enclosure. • Available as passive, with a 150Hz low pass filter, or active only.
Frequency Response:	<ul style="list-style-type: none"> • 50Hz – 250Hz
Components:	<ul style="list-style-type: none"> • Bass: 2 x 15" cone driver
Power handling:	<ul style="list-style-type: none"> • 800w
Sensitivity (1):	<ul style="list-style-type: none"> • 102dB
Directivity:	<ul style="list-style-type: none"> • Omni-directional
Construction:	<ul style="list-style-type: none"> • 18 mm birch plywood
Finish:	<ul style="list-style-type: none"> • Water based textured black paint (M-Spec and T-Spec) • Royal Blue carpet (R-Spec)
Connections:	<ul style="list-style-type: none"> • 2 x Neutrik NL4 connectors • Passive: 1+/1- Input 2+/2- No connection • Active: 1+/1- Input 2+/2- No connection
Dimensions:	<ul style="list-style-type: none"> • 505mm (W) x 780mm (H) x 500mm (D)
Packaged Dimensions:	<ul style="list-style-type: none"> • 520mm (W) x 805mm (H) x 515mm(D)
Impedance:	<ul style="list-style-type: none"> • 4 ohms
Weight:	<ul style="list-style-type: none"> • 60 Kg
Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.	

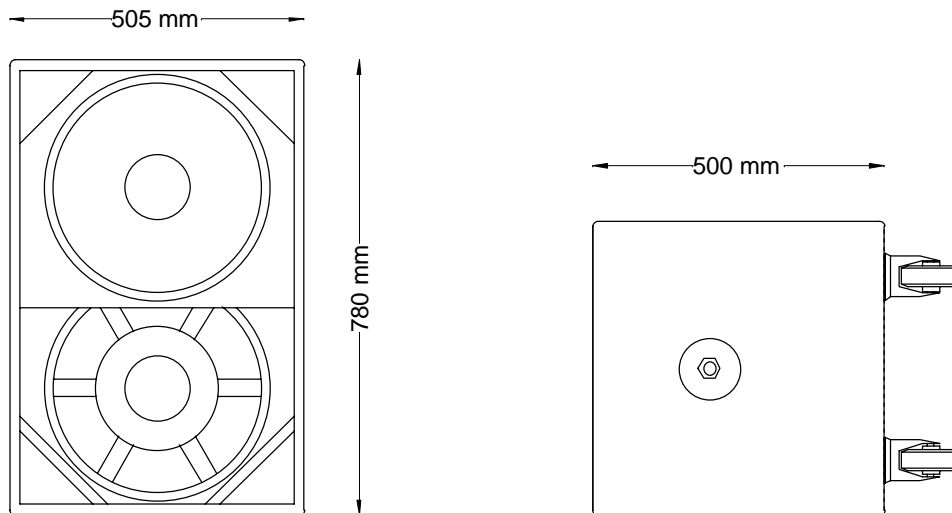

LS 215 Options

Cabinet	Code	Spec.	Handles	Tophat	M20 plate	M20 Blank	Castors	Bracket	Inserts/Fly Points
LS 215A	LS 2023	R-Spec	4 off	No	Yes	No	Yes	No	No
	LS 4023	M-Spec	4 off	No	No	Yes	No	No	No
	LS 6043	T-Spec	4 off	No	Yes	No	Yes	No	No
LS 215P	LS 2036	R-Spec	4 off	No	Yes	No	Yes	No	No
	LS 4036	M-Spec	4 off	No	No	Yes	No	No	No
	LS 6036	T-Spec	4 off	No	Yes	No	Yes	No	No