


## LS 218 – Technical Specifications (rev2 01/05/01)

<b>Description:</b>	<ul style="list-style-type: none"> <li>• A high power, sub bass enclosure.</li> </ul>
<b>Frequency Response:</b>	<ul style="list-style-type: none"> <li>• 40Hz – 250Hz</li> </ul>
<b>Components:</b>	<ul style="list-style-type: none"> <li>• Bass: 2 x 18" cone driver</li> </ul>
<b>Power handling:</b>	<ul style="list-style-type: none"> <li>• 1.6Kw</li> </ul>
<b>Sensitivity (1):</b>	<ul style="list-style-type: none"> <li>• 101dB</li> </ul>
<b>Directivity:</b>	<ul style="list-style-type: none"> <li>• Omni-directional</li> </ul>
<b>Construction:</b>	<ul style="list-style-type: none"> <li>• 18mm Birch plywood</li> </ul>
<b>Finish:</b>	<ul style="list-style-type: none"> <li>• Water based textured black paint (M-Spec and T-Spec)</li> <li>• Royal Blue carpet (R-Spec)</li> </ul>
<b>Connections:</b>	<ul style="list-style-type: none"> <li>• 2 x Neutrik NL4 connectors</li> <li>• 1+/1- Input 2+/2- No connection</li> </ul>
<b>Dimensions:</b>	<ul style="list-style-type: none"> <li>• 628mm (W) x 910mm (H) x 750mm (D)</li> </ul>
<b>Packaged Dimensions:</b>	<ul style="list-style-type: none"> <li>• 645mm (W) x 935mm (H) x 765mm(D)</li> </ul>
<b>Impedance:</b>	<ul style="list-style-type: none"> <li>• 4 ohms nominal</li> </ul>
<b>Weight:</b>	<ul style="list-style-type: none"> <li>• 89 Kg</li> </ul>
<b>Note:</b> (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.	

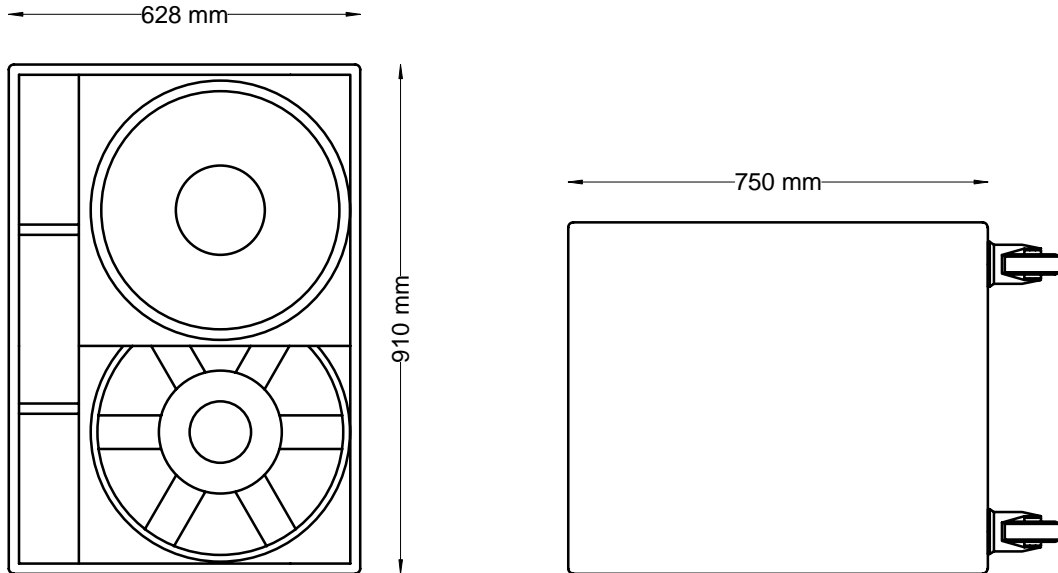

### LS 218 Options

Cabinet	Code	Spec.	Handles	Tophat	M20 plate	M20 Blank	Castors	Bracket	Inserts/Fly Points
LS 218A	LS 2025	R-Spec	4 off	No	No	No	Yes	No	No
	LS 4025	M-Spec	4 off	No	No	No	No	No	No
	LS 6025	T-Spec	4 off	No	No	No	Yes	No	No