




The Logic Systems IS15 cabinet combines a 15" Mid/Bass cone with 1.4" compression driver on a 90 x 40 horn flare. The cabinet is part of the IS series which is aimed specifically at the Bar and Club installation market. The IS Series are available with a range of bracket options to aid installation and can also be ordered in special colours to fit the needs of the designers. Standard colours are black, white and silver. The IS Series aims to bring both an audio and build quality that is not common at this price point. To this end all IS Series cabinets are constructed from birch ply and are rebated, glued and screwed.

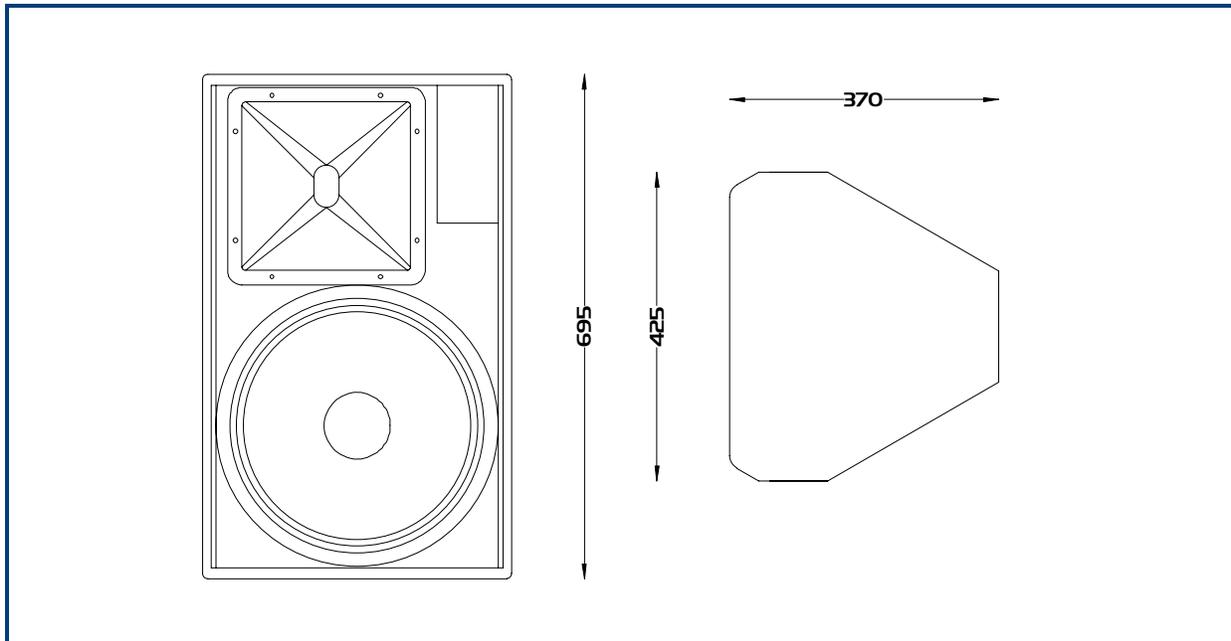

| | |
|-----------------------------|--|
| Frequency Response: | • 55Hz – 20kHz |
| Components: | • Bass/mid: 15" cone driver • HF: 1.4" compression driver |
| Power handling: | • 400W |
| Sensitivity (1): | • 98dB |
| Directivity: | • 90° x 40° above 1.5kHz |
| Impedance: | • 8 Ohms nominal |
| Construction: | • 15mm Birch plywood |
| Finish: | • Water based textured black paint |
| Connections: | • 1 x Neutrik NL4 MPR • 1+/2+ = Positive Input 1-/2- = Negative Input |
| Dimensions: | • 425mm (W) x 695mm (H) x 370mm (D) |
| Packaged Dimensions: | • 535mm (W) x 815mm (H) x 480mm (D) |
| Weight: | • 26Kg |

| Cabinet | Handles | Tophat | M20 plate | Castors | Bracket Pt. | Inserts/Fly Points |
|---------|---------|--------|-----------|---------|---------------|--------------------|
| IS15 | No | No | No | No | Back/Side/Top | 8 off M10 inserts |

Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.

E: sales@logicsystems.co.uk T: +44(0)1427 611791 w: www.logicsystems.co.uk